

EFFER 100



1S

	3510	2500	1750	kg
	2.43	3.64	5.23	m
1080 kg	7735	5510	3855	lb
2380 lb	7'11"	11'11"	17'1"	ft

2S

	3460	2380	1650	1250	kg
	2.43	3.72	5.32	7.00	m
1165 kg	7625	5245	3635	2755	lb
2565 lb	7'11"	12'2"	17'5"	22'11"	ft

3S

	3410	2260	1560	1165	935	kg
	2.43	3.81	5.41	7.09	8.77	m
1245 kg	7515	4980	3435	2565	2060	lb
2740 lb	7'11"	12'6"	17'8"	23'3"	28'9"	ft


Standard





MODEL							
	txm	(°)	mm	mm	mm	mm	t
1S	9,16	380	2160	2300	660	3768 4918	10
2S	8,86	380	2160	2300	660	3768 4918	10
3S	8,61	380	2160	2300	660	3768 4918	10

MODEL							
	lb*ft	(°)	in	in	in	in	lb
1S	66280	380	85	90	26	148 194	22000
2S	64110	380	85	90	26	148 194	22000
3S	62300	380	85	90	26	148 194	22000

4S

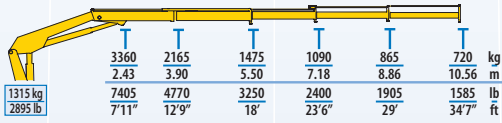

3S+JIB 2S



Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	8,44	380	2160	2320	660	3768 4918	10
3S+JIB 2S	8,61	380	2160	2455	765	3768 4918	10

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	61070	380	85	91	26	148 194	22000
3S+JIB 2S	62300	380	85	97	30	148 194	22000