



EFFER 1155




6S

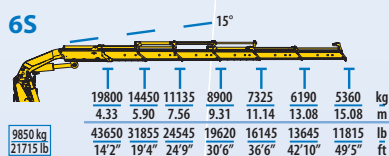


7S

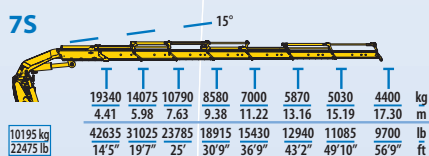


8S

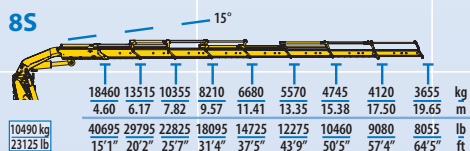

9S

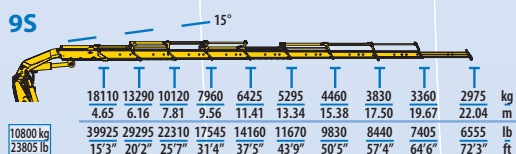


Standard

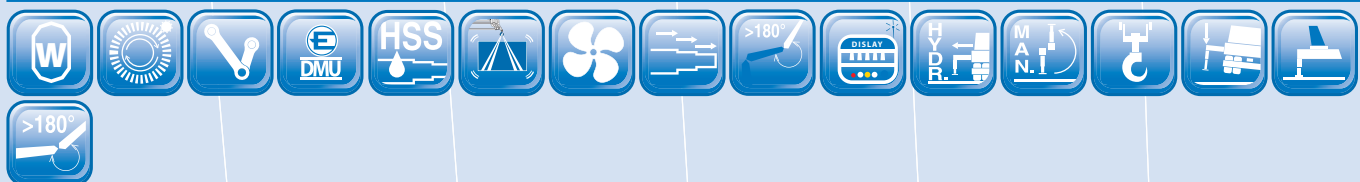



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	85,77	∞	2700	2550	2035	9600	32
7S	85,29	∞	2700	2550	2035	9600	32
8S	84,92	∞	2700	2550	2035	9600	32
9S	84,21	∞	2700	2550	2120	9600	32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	620590	∞	106	100	80	378	70500
7S	617110	∞	106	100	80	378	70500
8S	614440	∞	106	100	80	378	70500
9S	609300	∞	106	100	83	378	70500


6S + JIB 4S





6S + JIB 6S

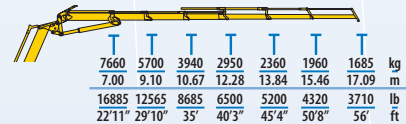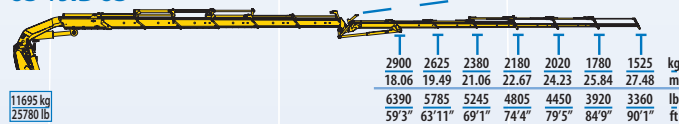


7S + JIB 4S





7S + JIB 6S

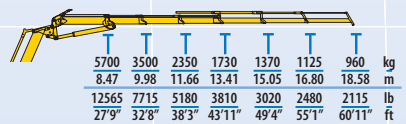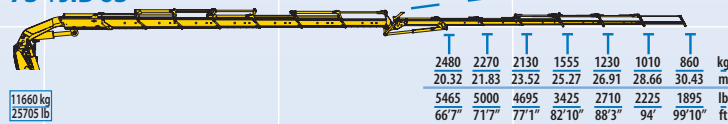

8S + JIB 4S LIGHT



8S + JIB 4S HEAVY DUTY

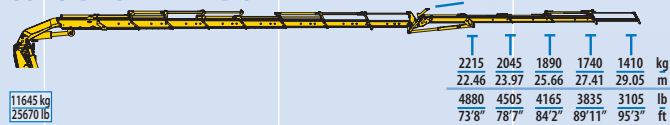



Optional





MODEL	txm	(°)	mm	mm	mm	mm	t
6S + JIB 4S	85,77	∞	2920	2550	2195	9600	32
6S + JIB 6S	85,77	∞	2920	2550	2195	9600	32
7S + JIB 4S	85,29	∞	2920	2550	2195	9600	32
7S + JIB 6S	85,29	∞	2920	2550	2195	9600	32
8S + JIB 4S LIGHT	84,92	∞	2920	2550	2195	9600	32
8S + JIB 4S HD	84,92	∞	2920	2550	2195	9600	32

MODEL	lb*ft	(°)	in	in	in	in	lb
6S + JIB 4S	620590	∞	115	100	86	378	70500
6S + JIB 6S	620590	∞	115	100	86	378	70500
7S + JIB 4S	617110	∞	115	100	86	378	70500
7S + JIB 6S	617110	∞	115	100	86	378	70500
8S + JIB 4S LIGHT	614440	∞	115	100	86	378	70500
8S + JIB 4S HD	614440	∞	115	100	86	378	70500


8S + JIB 6S LIGHT

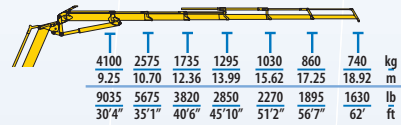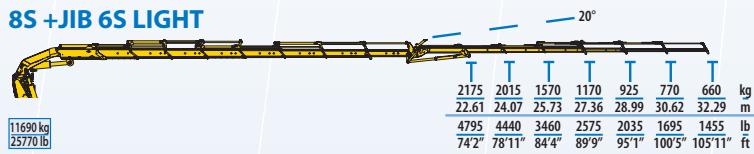

8S + JIB 6S HEAVY DUTY

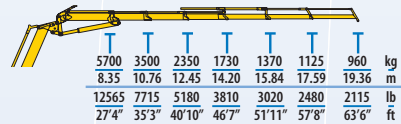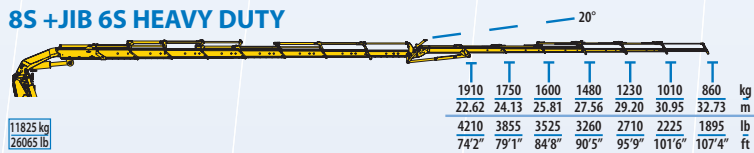

9S + JIB 6S

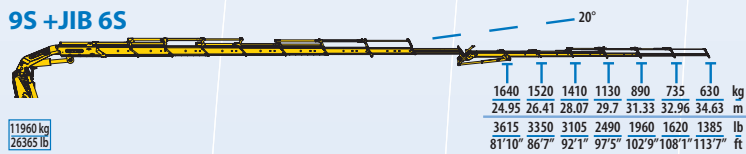

MODEL							
	txm	(°)	mm	mm	mm	mm	t
8S + JIB 6S LIGHT	84,92	∞	2920	2550	2195	9600	32
8S + JIB 6S HD	84,92	∞	2920	2550	2195	9600	32
9S + JIB 6S	84,21	∞	2920	2550	2195	9600	32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
8S + JIB 6S LIGHT	614440	∞	115	100	86	378	70500
8S + JIB 6S HD	614440	∞	115	100	86	378	70500
9S + JIB 6S	609300	∞	115	100	86	378	70500

