

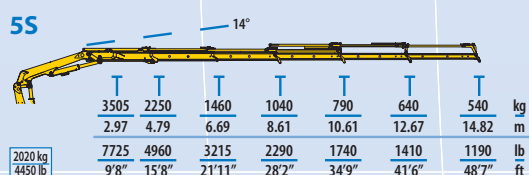
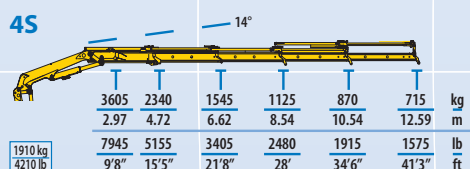


EFFER 135

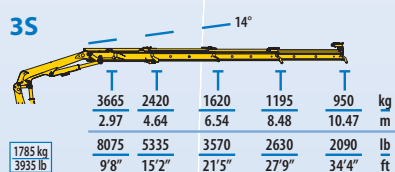


Standard




MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	11,83	400	2255	2495	780	4555 5955	13
3S	11,23	400	2255	2495	780	4555 5955	13
4S	11,04	400	2255	2495	780	4555 5955	13
5S	10,77	400	2255	2505	900	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	85600	400	89	98	31	179 234	28700
3S	81250	400	89	98	31	179 234	28700
4S	79880	400	89	98	31	179 234	28700
5S	77930	400	89	99	35	179 234	28700



6S

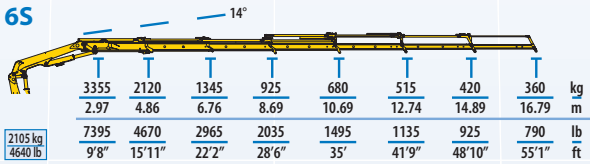


2S+JIB 2S




3S+JIB 2S

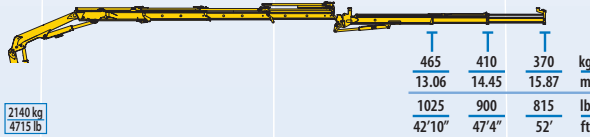


3S+JIB 3S



4S+JIB 2S



4S+JIB 3S



Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	10,31	400	2255	2505	900	4555 5955	13
2S+JIB 2S	11,23	400	2255	2500	875	4555 5955	13
3S+JIB 2S	11,23	400	2255	2500	875	4555 5955	13
3S+JIB 3S	11,23	400	2255	2500	875	4555 5955	13
4S+JIB 2S	11,04	400	2255	2500	875	4555 5955	13
4S+JIB 3S	11,04	400	2255	2500	875	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	74600	400	89	99	35	179 234	28700
2S+JIB 2S	85600	400	89	98	34	179 234	28700
3S+JIB 2S	81250	400	89	98	34	179 234	28700
3S+JIB 3S	81250	400	89	98	34	179 234	28700
4S+JIB 2S	79880	400	89	98	34	179 234	28700
4S+JIB 3S	79880	400	89	98	34	179 234	28700