

EFFER 145



2S

14°

T	4165	2790	1930	1470	kg
	2.97	4.56	6.47	8.39	m
1665 kg	9180	6150	4250	3240	lb
3679 lb	9'8"	14'11"	21'2"	27'6"	ft

3S

14°

T	3995	2635	1770	1315	1045	kg
	2.97	4.64	6.54	8.47	10.47	m
1795 kg	8805	5805	3900	2895	2300	lb
3955 lb	9'8"	15'2"	21'5"	27'9"	34'4"	ft

4S

14°

T	3895	2525	1680	1225	950	780	kg
	2.97	4.72	6.62	8.54	10.54	12.59	m
1920 kg	8585	5565	3700	2700	2090	1715	lb
4230 lb	9'8"	15'5"	21'8"	28'	34'6"	41'3"	ft

5S

14°








T	3825	2450	1610	1160	890	720	610	kg
	2.97	4.79	6.87	8.61	10.61	12.67	14.82	m
2030 kg	8430	5400	3545	2555	1960	1585	1340	lb
4475 lb	9'8"	15'8"	22'6"	28'2"	34'9"	41'6"	48'7"	ft

Standard



MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	12,75	400	2255	2495	780	4555 5955	13
3S	12,23	400	2255	2495	780	4555 5955	13
4S	11,89	400	2255	2495	780	4555 5955	13
5S	11,73	400	2255	2495	900	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	92250	400	89	98	31	179 234	28700
3S	88490	400	89	98	31	179 234	28700
4S	86030	400	89	98	31	179 234	28700
5S	84870	400	89	98	35	179 234	28700

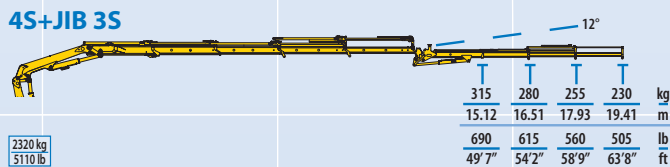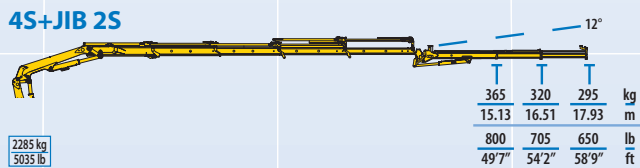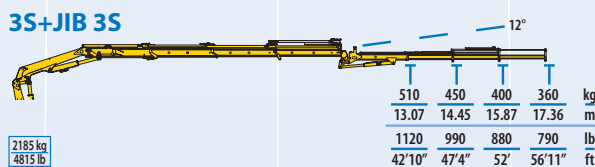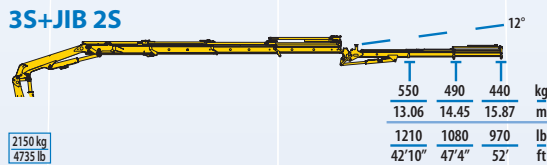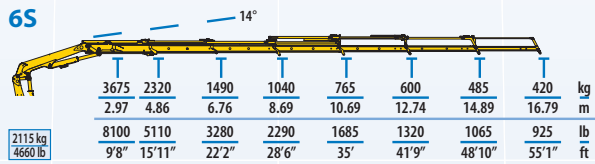

Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	11,28	400	2255	2505	900	4555 5955	13
3S+JIB 2S	12,23	400	2255	2500	875	4555 5955	13
3S+JIB 3S	12,23	400	2255	2500	875	4555 5955	13
4S+JIB 2S	11,89	400	2255	2500	875	4555 5955	13
4S+JIB 3S	11,89	400	2255	2500	875	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	81620	400	89	99	35	179 234	28700
3S+JIB 2S	88490	400	89	98	34	179 234	28700
3S+JIB 3S	88490	400	89	98	34	179 234	28700
4S+JIB 2S	86030	400	89	98	34	179 234	28700
4S+JIB 3S	86030	400	89	98	34	179 234	28700