

EFFER 150



2S

	4890	3250	2210	1680	kg
	2.73	4.27	6.17	8.09	m
1750 kg	10780	7160	4870	3700	lb
3855 lb	8'11"	14'	20'2"	26'6"	ft

3S

	4780	3130	2105	1570	1250	kg
	2.73	4.34	6.24	8.17	10.17	m
1885 kg	10535	6900	4640	3460	2755	lb
4155 lb	8'11"	14'2"	20'5"	26'9"	33'4"	ft

4S

	4580	2950	1960	1435	1120	925	kg
	2.73	4.41	6.31	8.24	10.24	12.29	m
2005 kg	10095	6500	4320	3160	2465	2035	lb
4420 lb	8'11"	14'5"	20'8"	27'	33'7"	40'3"	ft

5S

	4500	2850	1860	1330	1010	810	680	kg
	2.73	4.49	6.39	8.32	10.32	12.37	14.52	m
2115 kg	9920	6280	4100	2930	2225	1785	1495	lb
4660 lb	8'11"	14'8"	20'11"	27'3"	33'10"	40'7"	47'7"	ft


Standard





MODEL						
	txm	(°)	mm	mm	mm	t
2S	13,86	400	2295	2495	810	5960
3S	13,58	400	2295	2495	810	5960
4S	13,02	400	2295	2495	810	5960
5S	12,79	400	2295	2505	920	5960

MODEL						
	lb*ft	(°)	in	in	in	lb
2S	100280	400	90	98	32	235
3S	98260	400	90	98	32	235
4S	94210	400	90	98	32	235
5S	92540	400	90	99	36	235


3S+JIB 2S



3S+JIB 3S

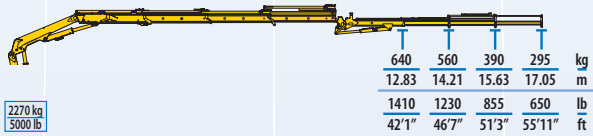

4S+JIB 2S



Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
3S+JIB 2S	13,58	400	2295	2505	910	5960	15
3S+JIB 3S	13,58	400	2295	2505	910	5960	15
4S+JIB 2S	13,02	400	2295	2505	910	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
3S+JIB 2S	98260	400	90	99	36	235	33100
3S+JIB 3S	98260	400	90	99	36	235	33100
4S+JIB 2S	94210	400	90	99	36	235	33100