

EFFER 175



2S

14°

T	5240	3510	2410	1835	kg
	2.81	4.35	6.25	8.17	m
1855 kg	11550	7735	5310	4045	lb
4065 lb	9'2"	14'3"	20'6"	26'9"	ft

3S

14°

T	5130	3385	2300	1720	1380	kg
	2.81	4.42	6.32	8.25	10.25	m
1985 kg	11305	7460	5070	3790	3040	lb
4375 lb	9'2"	14'6"	20'8"	27'	33'7"	ft

4S

14°

T	5000	3240	2170	1600	1255	1035	kg
	2.81	4.50	6.40	8.32	10.32	12.38	m
2110 kg	11020	7140	4780	3525	2765	2280	lb
4650 lb	9'2"	14'9"	20'11"	27'3"	33'10"	40'7"	ft

5S

14°

T	4850	3100	2045	1480	1135	915	770	kg
	2.81	4.57	6.47	8.40	10.40	12.45	14.60	m
2220 kg	10690	6830	4505	3260	2500	2015	1695	lb
4890 lb	9'2"	14'11"	21'2"	27'6"	34'1"	40'10"	47'10"	ft


Standard




MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	15,26	400	2295	2495	810	5960	15
3S	14,97	400	2295	2495	810	5960	15
4S	14,57	400	2295	2495	810	5960	15
5S	14,17	400	2295	2505	920	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	110410	400	90	98	32	235	33100
3S	108320	400	90	98	32	235	33100
4S	105420	400	90	98	32	235	33100
5S	102530	400	90	99	36	235	33100



6S

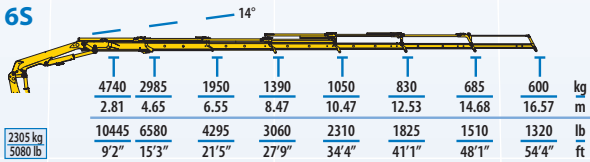



3S+JIB 2S




3S+JIB 3S

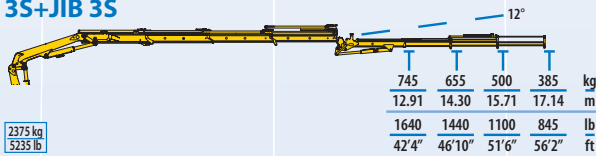

4S+JIB 2S

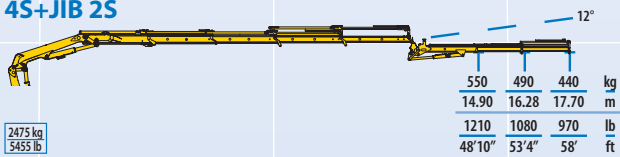

4S+JIB 3S

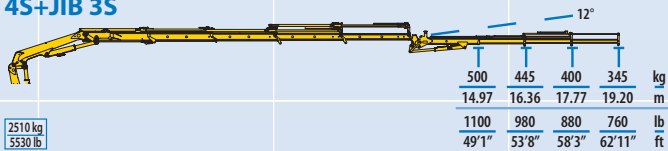

Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	13,88	400	2295	2505	920	5960	15
3S+JIB 2S	14,97	400	2295	2505	910	5960	15
3S+JIB 3S	14,97	400	2295	2505	910	5960	15
4S+JIB 2S	14,57	400	2295	2505	910	5960	15
4S+JIB 3S	14,57	400	2295	2505	910	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	100430	400	90	99	36	235	33100
3S+JIB 2S	108320	400	90	99	36	235	33100
3S+JIB 3S	108320	400	90	99	36	235	33100
4S+JIB 2S	105420	400	90	99	36	235	33100
4S+JIB 3S	105420	400	90	99	36	235	33100