


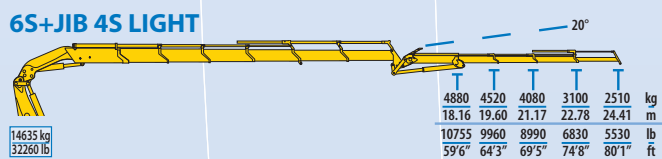
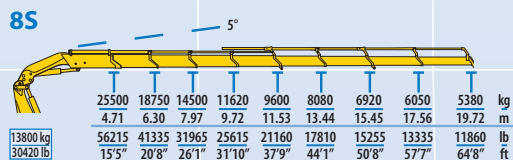


EFFER 1750

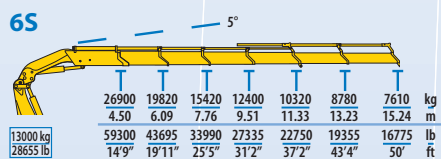



Standard





MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	125,80	∞	2650	2550	2600	10100	32
6S	121,20	∞	2650	2550	2600	10100	32
8S	120,10	∞	2650	2550	2600	10100	32
6S+JIB 4S LIGHT	121,20	∞	2900	2550	2825	10100	32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	910220	∞	104	100	102	398	70500
6S	876940	∞	104	100	102	398	70500
8S	868980	∞	104	100	102	398	70500
6S+JIB 4S LIGHT	876940	∞	114	100	111	398	70500



6S+JIB 4S HEAVY DUTY

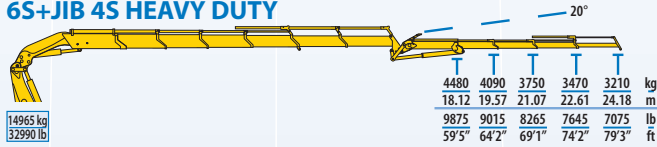



6S+JIB 6S LIGHT

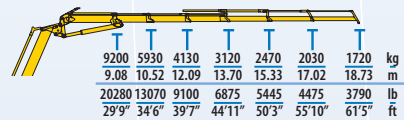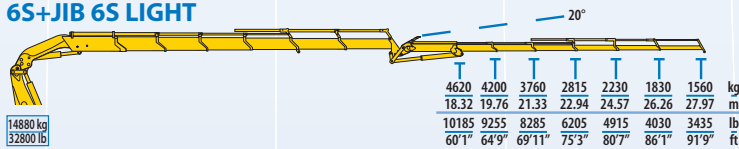



6S+JIB 6S HEAVY DUTY

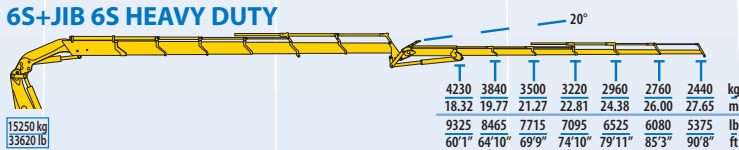



8S+JIB 4S HEAVY DUTY

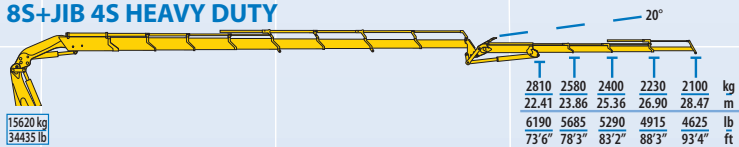

8S+JIB 6S LIGHT

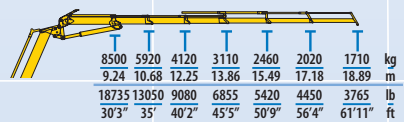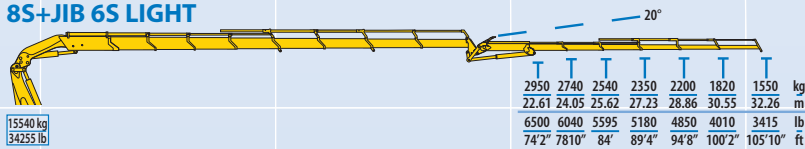

8S+JIB 6S HEAVY DUTY

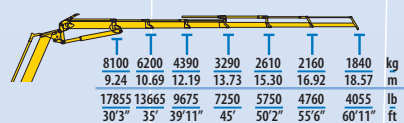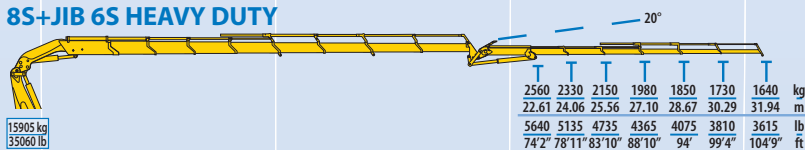

Optional



MODEL	txm	(°)	mm	mm	mm	mm	t
6S+JIB 4S HD	121,20	∞	2900	2550	2825	10100	32
6S+JIB 6S LIGHT	121,20	∞	2900	2550	2825	10100	32
6S+JIB 6S HD	121,20	∞	2900	2550	2825	10100	32
8S+JIB 4S HD	120,10	∞	2900	2550	2825	10100	32
8S+JIB 6S LIGHT	120,10	∞	2900	2550	2825	10100	32
8S+JIB 6S HD	120,10	∞	2900	2550	2825	10100	32

MODEL	lb*ft	(°)	in	in	in	in	lb
6S+JIB 4S HD	876940	∞	114	100	111	398	70500
6S+JIB 6S LIGHT	876940	∞	114	100	111	398	70500
6S+JIB 6S HD	876940	∞	114	100	111	398	70500
8S+JIB 4S HD	868980	∞	114	100	111	398	70500
8S+JIB 6S LIGHT	868980	∞	114	100	111	398	70500
8S+JIB 6S HD	868980	∞	114	100	111	398	70500