

# EFFER 210



## 2S

|                    |       |       |       |       |    |
|--------------------|-------|-------|-------|-------|----|
|                    | 6410  | 4300  | 2880  | 2165  | kg |
|                    | 2.67  | 4.40  | 6.50  | 8.60  | m  |
| 2495 kg<br>5500 lb | 14130 | 9475  | 6345  | 4770  | lb |
|                    | 8'9"  | 14'5" | 21.3" | 28'2" | ft |

## 3S

|                    |       |       |       |       |       |    |
|--------------------|-------|-------|-------|-------|-------|----|
|                    | 6180  | 4020  | 2660  | 1950  | 1580  | kg |
|                    | 2.67  | 4.48  | 6.58  | 8.68  | 10.78 | m  |
| 2660 kg<br>5860 lb | 13620 | 8860  | 5860  | 4295  | 3480  | lb |
|                    | 8'9"  | 14'8" | 21'7" | 28'5" | 35'4" | ft |

## 4S

|                    |       |        |        |       |       |       |    |
|--------------------|-------|--------|--------|-------|-------|-------|----|
|                    | 6000  | 3800   | 2440   | 1820  | 1415  | 1140  | kg |
|                    | 2.67  | 4.56   | 6.66   | 8.76  | 10.86 | 12.96 | m  |
| 2795 kg<br>6160 lb | 13225 | 8375   | 5375   | 4010  | 3115  | 2510  | lb |
|                    | 8'9"  | 14'11" | 21'10" | 28'8" | 35'7" | 42'6" | ft |

## 5S

|                    |       |       |      |        |        |       |       |    |
|--------------------|-------|-------|------|--------|--------|-------|-------|----|
|                    | 5900  | 3635  | 2320 | 1660   | 1270   | 1030  | 880   | kg |
|                    | 2.67  | 4.63  | 6.73 | 8.83   | 10.93  | 13.03 | 15.13 | m  |
| 2945 kg<br>6490 lb | 13005 | 8010  | 5110 | 3655   | 2795   | 2270  | 1940  | lb |
|                    | 8'9"  | 15'2" | 22'  | 28'11" | 35'10" | 42'8" | 49'7" | ft |


## Standard





| MODEL |       |     |      |      |      |              |    |
|-------|-------|-----|------|------|------|--------------|----|
|       | txm   | (°) | mm   | mm   | mm   | mm           | t  |
| 2S    | 18,94 | 400 | 2375 | 2485 | 990  | 5050<br>5700 | 18 |
| 3S    | 18,02 | 400 | 2375 | 2485 | 990  | 5050<br>5700 | 18 |
| 4S    | 17,32 | 400 | 2375 | 2485 | 990  | 5050<br>5700 | 18 |
| 5S    | 16,85 | 400 | 2375 | 2485 | 1160 | 5050<br>5700 | 18 |

| MODEL |        |     |    |    |    |            |       |
|-------|--------|-----|----|----|----|------------|-------|
|       | lb*ft  | (°) | in | in | in | in         | lb    |
| 2S    | 137040 | 400 | 94 | 98 | 39 | 199<br>224 | 39700 |
| 3S    | 130380 | 400 | 94 | 98 | 39 | 199<br>224 | 39700 |
| 4S    | 125320 | 400 | 94 | 98 | 39 | 199<br>224 | 39700 |
| 5S    | 121920 | 400 | 94 | 98 | 46 | 199<br>224 | 39700 |



## 6S

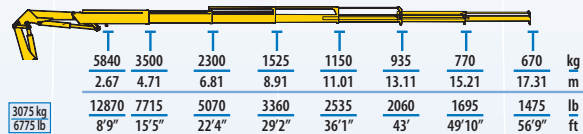



## 2S+JIB 2S

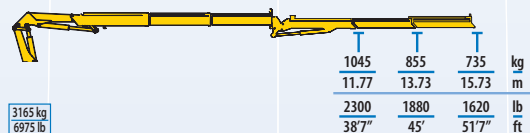

## 3S+JIB 2S

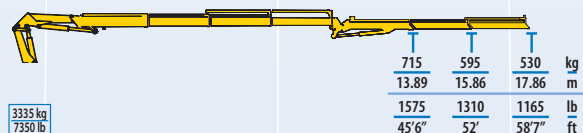

## 4S+JIB 2S

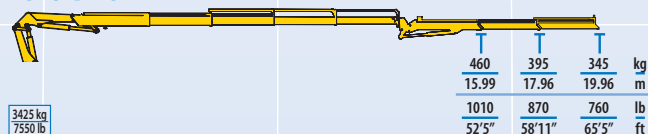

## Optional



| MODEL     |       |     |      |      |      |              |
|-----------|-------|-----|------|------|------|--------------|
|           | txm   | (°) | mm   | mm   | mm   | t            |
| 6S        | 16,49 | 400 | 2375 | 2485 | 1160 | 5050<br>5700 |
| 2S+JIB 2S | 18,94 | 400 | 2540 | 2485 | 1080 | 5050<br>5700 |
| 3S+JIB 2S | 18,02 | 400 | 2540 | 2485 | 1080 | 5050<br>5700 |
| 4S+JIB 2S | 17,32 | 400 | 2540 | 2485 | 1080 | 5050<br>5700 |

| MODEL     |        |     |     |    |    |            |
|-----------|--------|-----|-----|----|----|------------|
|           | lb*ft  | (°) | in  | in | in | lb         |
| 6S        | 119310 | 400 | 94  | 98 | 46 | 199<br>224 |
| 2S+JIB 2S | 137040 | 400 | 100 | 98 | 43 | 199<br>224 |
| 3S+JIB 2S | 130380 | 400 | 100 | 98 | 43 | 199<br>224 |
| 4S+JIB 2S | 125320 | 400 | 100 | 98 | 43 | 199<br>224 |