

EFFER 250



2S

	8140	5200	3440	2615	kg
	2.59	4.32	6.42	8.52	m
2535 kg 5585 lb	17945	11460	7580	5765	lb
	8'5"	14'2"	21'	27'11"	ft

3S

	7730	4880	3235	2390	1900	kg
	2.59	4.40	6.50	8.60	10.70	m
2700 kg 5950 lb	17040	10755	7130	5265	4185	lb
	8'5"	14'5"	21'3"	28'2"	35'1"	ft

4S

	7630	4680	3065	2250	1740	1455	kg
	2.59	4.48	6.58	8.68	10.78	12.88	m
2835 kg 6250 lb	16820	10315	6755	4960	3835	3205	lb
	8'5"	14'8"	21'7"	28'5"	35'4"	42'3"	ft

5S

	7500	4420	2850	2095	1580	1290	1100	kg
	2.59	4.55	6.65	8.75	10.85	12.95	15.05	m
2985 kg 6580 lb	16530	9740	6280	4615	3480	2840	2425	lb
	8'5"	14'11"	21'9"	28'8"	35'7"	42'5"	49'4"	ft


Standard





MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	22,47	400	2375	2485	990	5050 5700	18
3S	21,47	400	2375	2485	990	5050 5700	18
4S	20,95	400	2375	2485	990	5050 5700	18
5S	20,12	400	2375	2485	1160	5050 5700	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	162580	400	94	98	39	199 224	39700
3S	155350	400	94	98	39	199 224	39700
4S	151580	400	94	98	39	199 224	39700
5S	145580	400	94	98	46	199 224	39700



6S

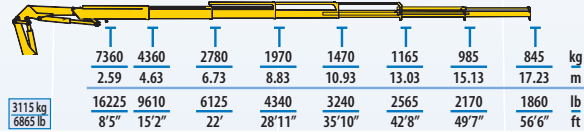



2S+JIB 2S

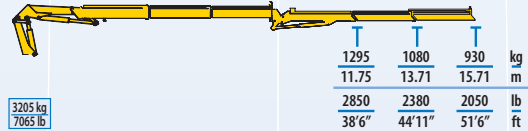



3S+JIB 2S

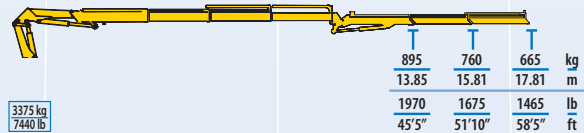



3S+JIB 3S

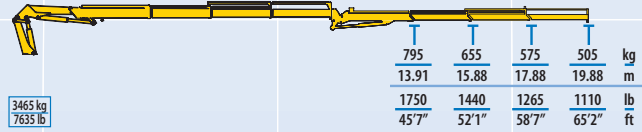

4S+JIB 2S

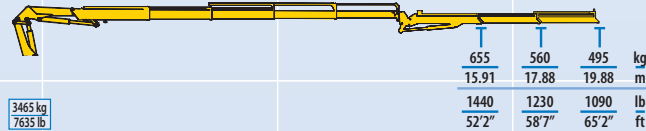

4S+JIB 3S

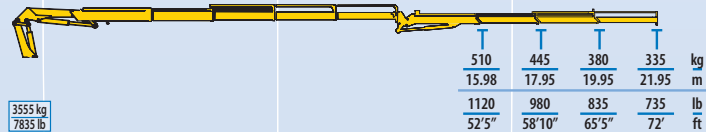

Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
6S	20,19	400	2375	2485	1160	5050 5700	18
2S+JIB 2S	22,47	400	2540	2485	1080	5050 5700	18
3S+JIB 2S	21,47	400	2540	2485	1080	5050 5700	18
3S+JIB 3S	21,47	400	2540	2485	1080	5050 5700	18
4S+JIB 2S	20,95	400	2540	2485	1080	5050 5700	18
4S+JIB 3S	20,95	400	2400	2485	1080	5050 5700	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
6S	146080	400	94	98	46	199 224	39700
2S+JIB 2S	162580	400	100	98	43	199 224	39700
3S+JIB 2S	155350	400	100	98	43	199 224	39700
3S+JIB 3S	155350	400	100	98	43	199 224	39700
4S+JIB 2S	151580	400	100	98	43	199 224	39700
4S+JIB 3S	151580	400	94	98	43	199 224	39700