

Standard




MODEL							
	txm	(°)	mm	mm	mm	mm	t
3S	27,14	∞	2355	2500	1025	5654 6590	18
4S	26,59	∞	2355	2500	1025	5654 6590	18
5S	26,22	∞	2355	2500	1075	5654 6590	18
6S	25,82	∞	2355	2500	1075	5654 6590	18



MODEL							
	lb*ft	(°)	in	in	in	in	lb
3S	196370	∞	93	98	40	223 259	39700
4S	192390	∞	93	98	40	223 259	39700
5S	189710	∞	93	98	42	223 259	39700
6S	186820	∞	93	98	42	223 259	39700

EFFER 305



8S

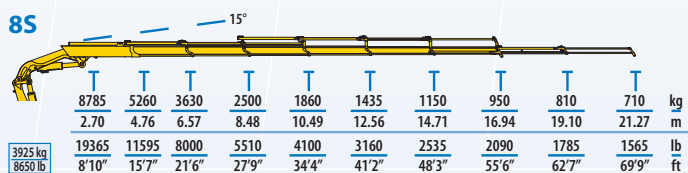


4S+JIB 3S LIGHT

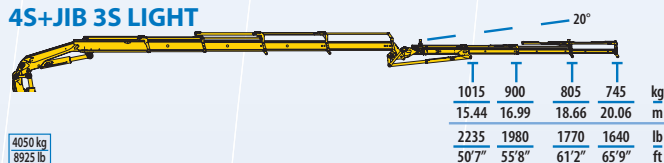



4S+JIB 3S HEAVY DUTY

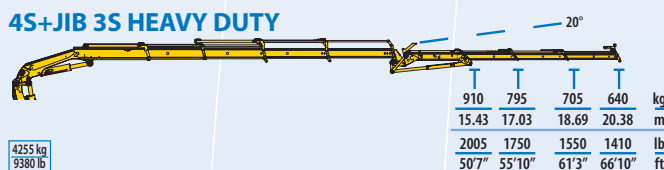


4S+JIB 4S LIGHT

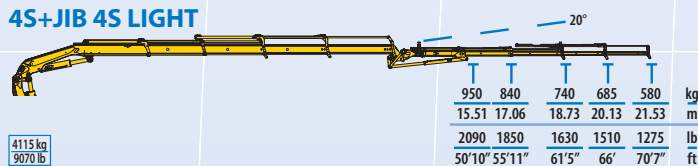

4S+JIB 4S HEAVY DUTY

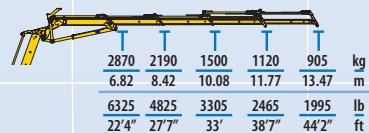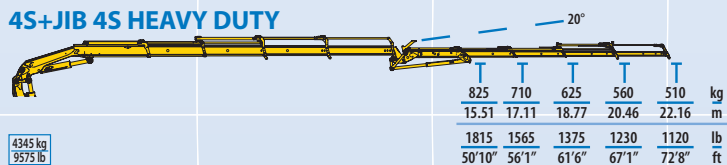

5S+JIB 3S

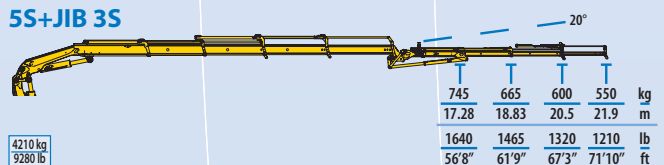



Optional




MODEL	txm	(°)	mm	mm	mm	mm	t
8S	25,04	∞	2355	2500	1145	5654 6590	18
4S+JIB 3S LIGHT	26,59	∞	2540	2500	1130	5654 6590	18
4S+JIB 3S HD	26,59	∞	2600	2500	1130	5654 6590	18
4S+JIB 4S LIGHT	26,59	∞	2540	2500	1130	5654 6590	18
4S+JIB 4S HD	26,59	∞	2600	2500	1130	5654 6590	18
5S+JIB 3S	26,22	∞	2540	2500	1185	5654 6590	18

MODEL	lb*ft	(°)	in	in	in	in	lb
8S	181180	∞	93	98	45	223 259	39700
4S+JIB 3S LIGHT	192390	∞	100	98	44	223 259	39700
4S+JIB 3S HD	192390	∞	102	98	44	223 259	39700
4S+JIB 4S LIGHT	192390	∞	100	98	44	223 259	39700
4S+JIB 4S HD	192390	∞	102	98	44	223 259	39700
5S+JIB 3S	189710	∞	100	98	47	223 259	39700



5S+JIB 4S

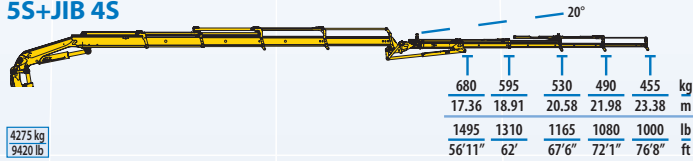

6S+JIB 3S

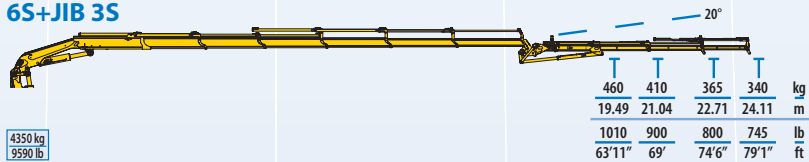

6S+JIB 4S

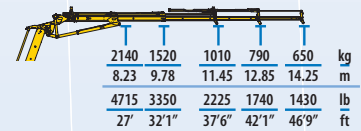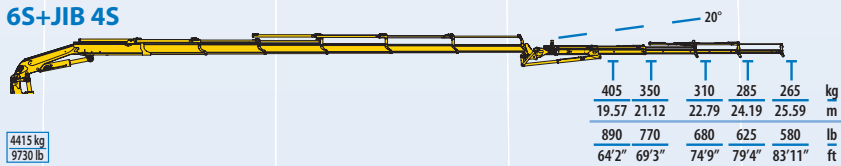

MODEL							
	txm	(°)	mm	mm	mm	mm	t
5S+JIB 4S	26,22	∞	2540	2500	1185	5654 6590	18
6S+JIB 3S	25,82	∞	2540	2500	1185	5654 6590	18
6S+JIB 4S	25,82	∞	2540	2500	1185	5654 6590	18

MODEL							
	lb*ft	(°)	in	in	in	in	lb
5S+JIB 4S	189710	∞	100	98	47	223 259	39700
6S+JIB 3S	186820	∞	100	98	47	223 259	39700
6S+JIB 4S	186820	∞	100	98	47	223 259	39700