



EFFER 365




3S

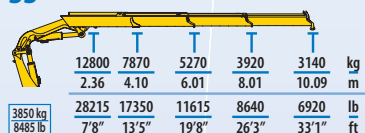


4S

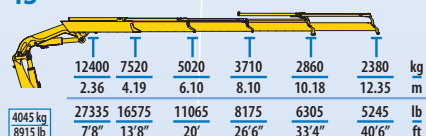

6S

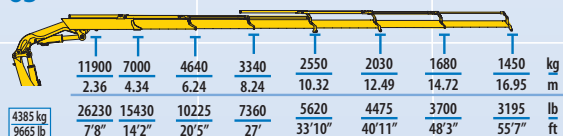

8S

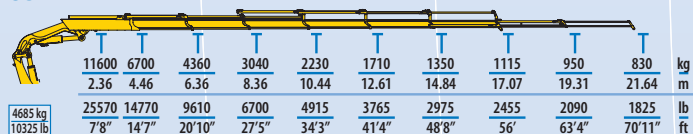


Standard





MODEL							
	txm	(°)	mm	mm	mm	mm	t
3S	32,27	407	2450	2500	1230	6400	26
4S	31,51	407	2450	2500	1230	6400	26
6S	30,38	407	2450	2500	1230	6400	26
8S	29,88	407	2450	2550	1285	6400	26

MODEL							
	lb*ft	(°)	in	in	in	in	lb
3S	233490	407	96	98	48	252	57300
4S	227990	407	96	98	48	252	57300
6S	219810	407	96	98	48	252	57300
8S	216200	407	96	100	51	252	57300



4S+JIB 3S

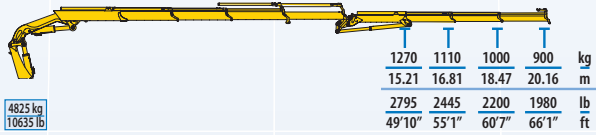



4S+JIB 4S

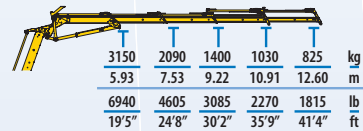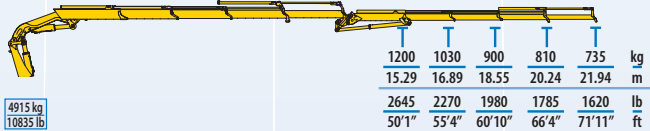


6S+JIB 3S LIGHT

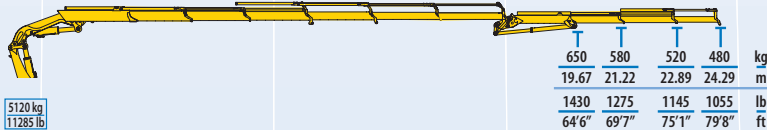



6S+JIB 3S HEAVY DUTY

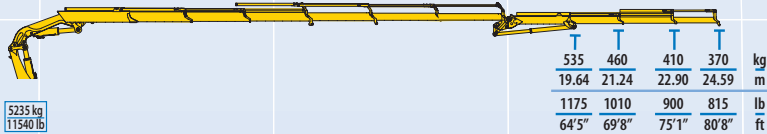

6S+JIB 4S LIGHT

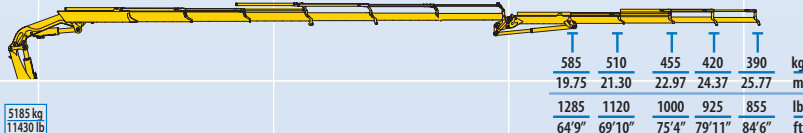

6S+JIB 4S HEAVY DUTY

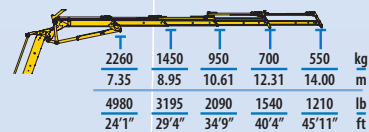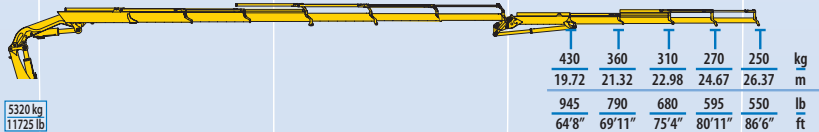

Optional



MODEL							
	tcm	(°)	mm	mm	mm	mm	t
4S+JIB 3S	31,51	407	2595	2512	1320	6400	26
4S+JIB 4S	31,51	407	2595	2512	1320	6400	26
6S+JIB 3S LIGHT	30,38	407	2695	2545	1395	6400	26
6S+JIB 3S HD	30,38	407	2695	2545	1395	6400	26
6S+JIB 4S LIGHT	30,38	407	2695	2545	1395	6400	26
6S+JIB 4S HD	30,38	407	2695	2545	1395	6400	26

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S+JIB 3S	227990	407	102	99	52	252	57300
4S+JIB 4S	227990	407	102	99	52	252	57300
6S+JIB 3S LIGHT	219810	407	106	100	55	252	57300
6S+JIB 3S HD	219810	407	106	100	55	252	57300
6S+JIB 4S LIGHT	219810	407	106	100	55	252	57300
6S+JIB 4S HD	219810	407	106	100	55	252	57300