






1S




2S



3S

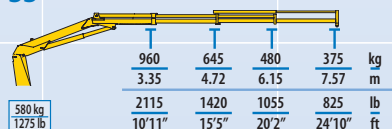

4S

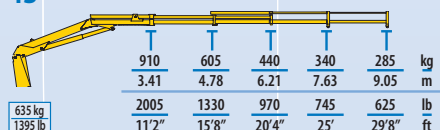

Standard



Optional



MODEL							
	txm	(°)	mm	mm	mm	mm	t
1S	3,45	380	1700	1965	515	2866 4066	3,5-5
2S	3,25	380	1700	1965	515	2866 4066	3,5-5
3S	3,21	380	1700	2020	535	2866 4066	3,5-5
4S	3,1	380	1700	2070	535	2866 4066	3,5-5

MODEL							
	lb*ft	(°)	in	in	in	in	lb
1S	24960	380	67	77	20	113 160	7700 1100
2S	23520	380	67	77	20	113 160	7700 1100
3S	23230	380	67	79	21	113 160	7700 1100
4S	22430	380	67	81	21	113 160	7700 1100