

EFFER 885

EFFER



4S

10°

23235	16450	11720	8985	7235	6030	kg
2.92	4.33	6.07	7.87	9.74	11.68	m
51220	36265	25835	19805	15950	13290	lb
9'6"	14'2"	19'10"	25'9"	31'11"	38'3"	ft

7210 kg
15895 lb

6S

10°

22665	15550	11000	8340	6610	5420	4570	3950	kg
2.92	4.48	6.23	8.03	9.89	11.84	13.88	16.01	m
49965	34280	24250	18385	14570	11945	10075	8705	lb
9'6"	14'8"	20'5"	26'4"	32'5"	38'10"	45'6"	52'6"	ft

7825 kg
17250 lb

7S

10°

22400	14930	10660	8065	6350	5160	4310	3640	3140	kg
2.92	4.63	6.3	8.07	9.94	11.88	13.92	16.05	18.26	m
49380	32910	23500	17780	13995	11375	9500	8020	6920	lb
9'6"	15'2"	20'8"	26'5"	32'7"	38'11"	45'8"	52'7"	59'10"	ft

8085 kg
17820 lb

8S

10°

22205	14630	10320	7730	6035	4835	3990	3380	2920	2550	kg
2.92	4.69	6.36	8.13	10	11.94	13.98	16.11	18.32	20.58	m
48950	32250	22750	17040	13300	10665	8795	7450	6435	5620	lb
9'6"	15'4"	20'10"	26'8"	32'9"	39'2"	45'10"	52'10"	60'1"	67'6"	ft

8370 kg
18450 lb












Standard



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	71,21	∞	2485	2550	1770	8710	26-32
6S	69,72	∞	2485	2550	1805	8710	26-32
7S	69,1	∞	2485	2550	1805	8710	26-32
8S	68,61	∞	2485	2550	1805	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	515240	∞	98	100	70	343	57300 70500
6S	504460	∞	98	100	71	343	57300 70500
7S	499970	∞	98	100	71	343	57300 70500
8S	496430	∞	98	100	71	343	57300 70500

EFFER 885

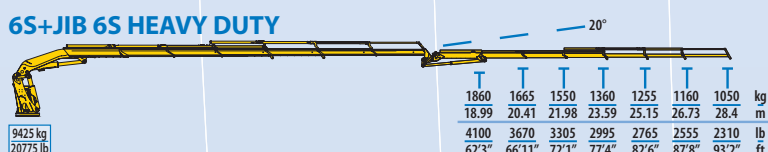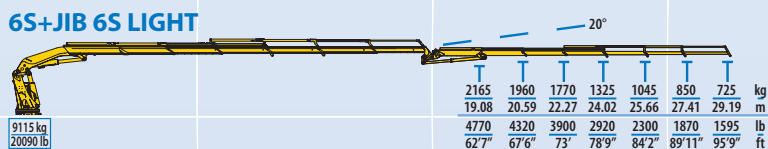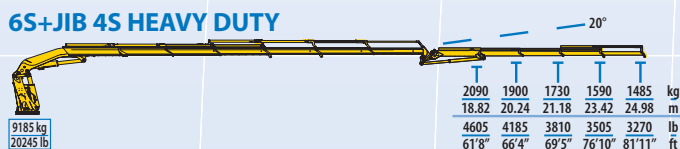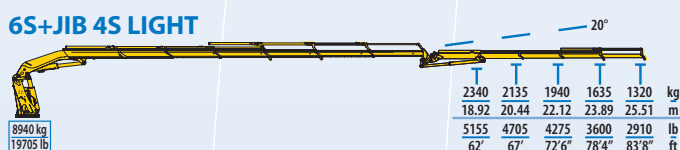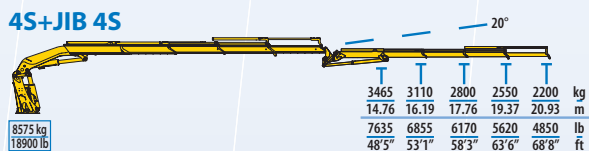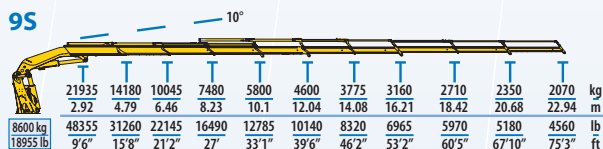



Optional





MODEL	txm	(°)	mm	mm	mm	mm	t
9S	67,9	∞	2485	2550	1805	8710	26-32
4S+JIB 4S	71,21	∞	2700	2550	2020	8710	26-32
6S+JIB 4S LIGHT	69,72	∞	2685	2550	2020	8710	26-32
6S+JIB 4S HD	69,72	∞	2700	2550	2020	8710	26-32
6S+JIB 6S LIGHT	69,72	∞	2685	2550	2020	8710	26-32
6S+JIB 6S HD	69,72	∞	2700	2550	2020	8710	26-32

MODEL	lb*ft	(°)	in	in	in	in	lb
9S	491290	∞	98	100	71	343	57300 70500
4S+JIB 4S	515240	∞	106	100	79	343	57300 70500
6S+JIB 4S LIGHT	504460	∞	106	100	79	343	57300 70500
6S+JIB 4S HD	504460	∞	106	100	79	343	57300 70500
6S+JIB 6S LIGHT	504460	∞	106	100	79	343	57300 70500
6S+JIB 6S HD	504460	∞	106	100	79	343	57300 70500



7S+JIB 4S

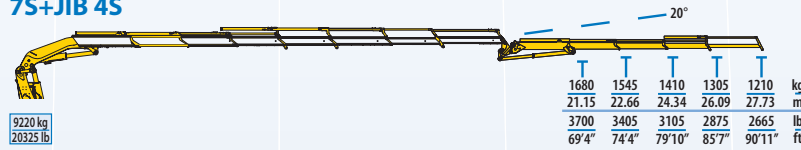


7S+JIB 6S

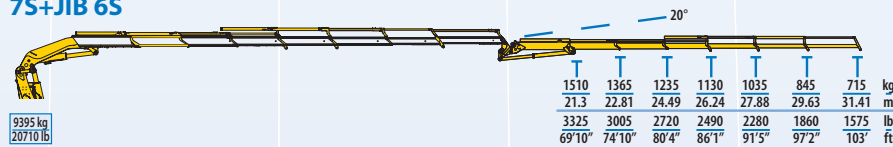

8S+JIB 4S



8S+JIB 6S



MODEL							
	txm	(°)	mm	mm	mm	mm	t
7S+JIB 4S	69,1	∞	2685	2550	2020	8710	26-32
7S+JIB 6S	69,1	∞	2685	2550	2020	8710	26-32
8S+JIB 4S	68,61	∞	2685	2550	2020	8710	26-32
8S+JIB 6S	68,61	∞	2685	2550	2020	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
7S+JIB 4S	499970	∞	106	100	79	343	57300 70500
7S+JIB 6S	499970	∞	106	100	79	343	57300 70500
8S+JIB 4S	496430	∞	106	100	79	343	57300 70500
8S+JIB 6S	496430	∞	106	100	79	343	57300 70500