

EFFER 955



4S

10°

24850	17600	12580	9660	7785	6500	kg
2.92	4.33	6.07	7.87	9.74	11.68	m
7210 kg	54780	38800	27730	21295	17160	lb
15895 lb	9'6"	14'2"	19'10"	25'9"	31'11"	ft

6S

10°

24350	16700	11840	9000	7160	5885	4970	4290	kg
2.92	4.48	6.23	8.03	9.89	11.84	13.88	16.01	m
7825 kg	53680	36815	26100	19840	15780	12970	10955	lb
17250 lb	9'6"	14'8"	20'5"	26'4"	32'5"	38'10"	45'6"	ft

7S

10°

24055	16040	11500	8730	6890	5620	4700	3990	3450	kg
2.92	4.63	6.3	8.07	9.94	11.88	13.92	16.05	18.26	m
8085 kg	53030	35360	25350	19245	15185	12385	10360	8795	lb
17820 lb	9'6"	15'2"	20'8"	26'5"	32'7"	38'11"	45'8"	52'7"	ft

8S

10°











23840	15720	11150	8380	6575	5290	4380	3720	3220	2820	kg
2.92	4.69	6.36	8.13	10	11.94	13.98	16.11	18.32	20.58	m
8370 kg	52555	34655	24580	18470	14495	11660	9655	8200	7095	lb
18450 lb	9'6"	15'4"	20'10"	26'8"	32'9"	39'2"	45'10"	52'10"	60'1"	ft

Standard



MODEL							
	txm	(°)	mm	mm	mm	mm	t
4S	76,41	∞	2485	2550	1770	8710	26-32
6S	74,88	∞	2485	2550	1805	8710	26-32
7S	74,24	∞	2485	2550	1805	8710	26-32
8S	73,72	∞	2485	2550	1805	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
4S	552860	∞	98	100	70	343	57300 70500
6S	541790	∞	98	100	71	343	57300 70500
7S	537160	∞	98	100	71	343	57300 70500
8S	533400	∞	98	100	71	343	57300 70500

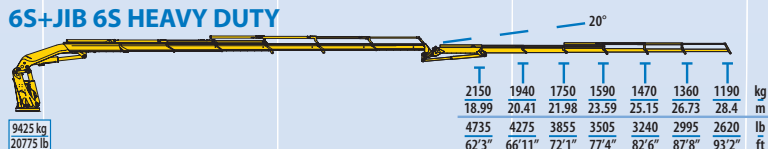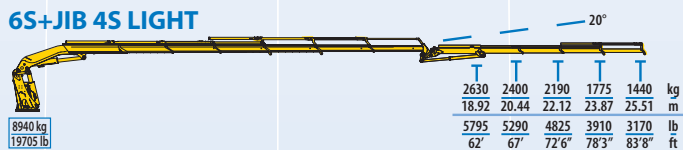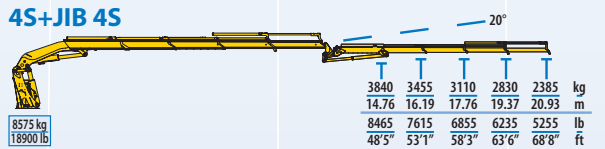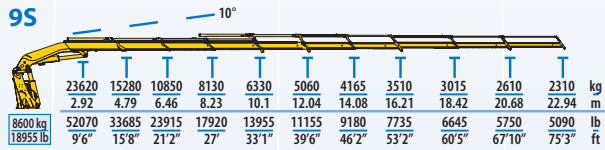



Optional





MODEL	txm	(°)	mm	mm	mm	mm	t
9S	73,17	∞	2485	2550	1805	8710	26-32
4S+JIB 4S	76,41	∞	2700	2550	2020	8710	26-32
6S+JIB 4S LIGHT	74,88	∞	2685	2550	2020	8710	26-32
6S+JIB 4S HD	74,88	∞	2700	2550	2020	8710	26-32
6S+JIB 6S LIGHT	74,88	∞	2685	2550	2020	8710	26-32
6S+JIB 6S HD	74,88	∞	2700	2550	2020	8710	26-32

MODEL	lb*ft	(°)	in	in	in	in	lb
9S	529420	∞	98	100	71	343	57300 70500
4S+JIB 4S	552860	∞	106	100	79	343	57300 70500
6S+JIB 4S LIGHT	541790	∞	106	100	79	343	57300 70500
6S+JIB 4S HD	541790	∞	106	100	79	343	57300 70500
6S+JIB 6S LIGHT	541790	∞	106	100	79	343	57300 70500
6S+JIB 6S HD	541790	∞	106	100	79	343	57300 70500


7S+JIB 4S





7S+JIB 6S

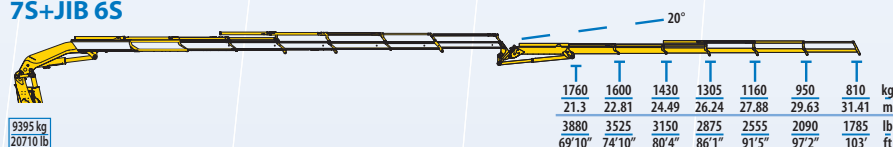

8S+JIB 4S



8S+JIB 6S



MODEL							
	txm	(°)	mm	mm	mm	mm	t
7S+JIB 4S	74,24	∞	2685	2550	2020	8710	26-32
7S+JIB 6S	74,24	∞	2685	2550	2020	8710	26-32
8S+JIB 4S	73,72	∞	2685	2550	2020	8710	26-32
8S+JIB 6S	73,72	∞	2685	2550	2020	8710	26-32

MODEL							
	lb*ft	(°)	in	in	in	in	lb
7S+JIB 4S	537160	∞	106	100	79	343	57300 70500
7S+JIB 6S	537160	∞	106	100	79	343	57300 70500
8S+JIB 4S	533400	∞	106	100	79	343	57300 70500
8S+JIB 6S	533400	∞	106	100	79	343	57300 70500